


Reference Design LAN for DNP/2486, eSOM/2586

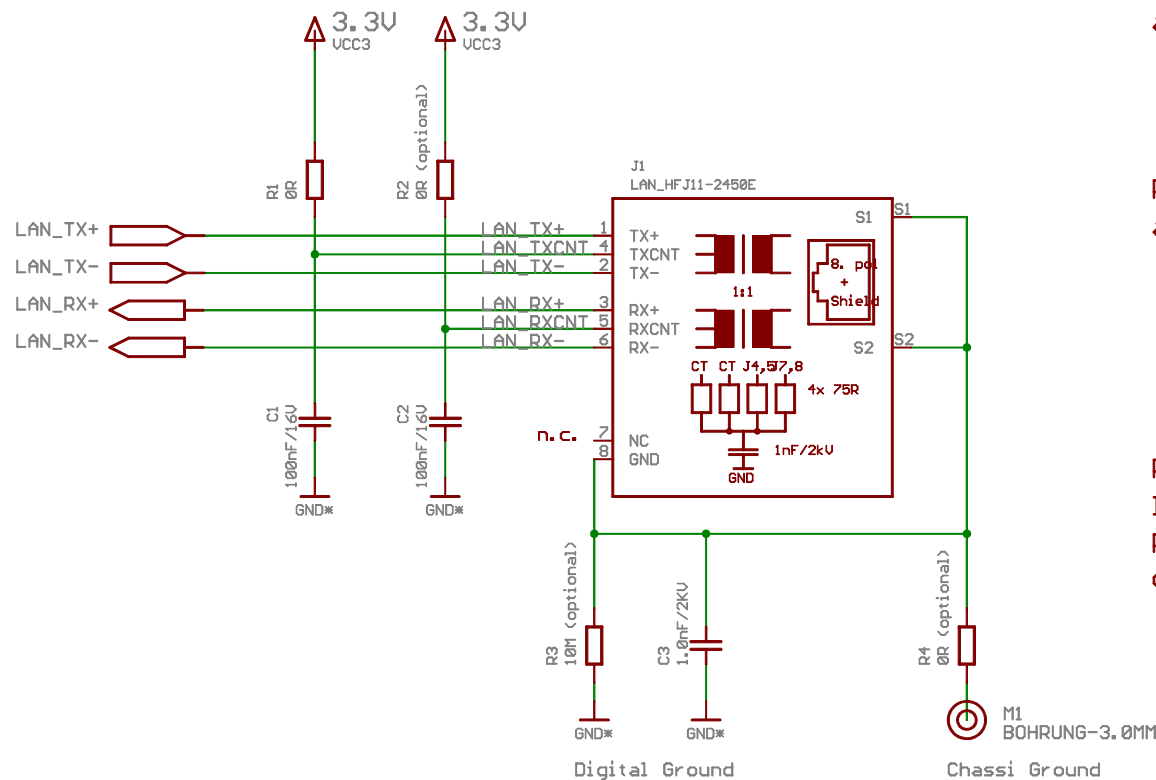

R2 is optional for full duplex.
R2 should be routed on PCB,
and only mounted in special cases.

Remember, the 2x50 Ohm for termination
are integrated in the DIL/NetPC.

R3, C3 and R4 are for Protection.
In mostly cases C3 is enough.
Please remember to not connect Digital Ground
(GND) with Chassi Ground (M1, S1, S2) directly.

All information without guarantee.

SSV EMBEDDED SYSTEMS

Dünenweg 5, D-30419 Hannover, Tel. 0511-40000-0, Fax -40

Design: LAN Reference Design for DNP/2486

File : LAN-DNP2486

DOKver: 1.0

Name:

REV:
A

Date : 01.06.2011 17:25:24

Sheet: 1/1

A4