



How to change the ADNP/9200 Factory-Set IP Address for LAN1 (ipaddree usage)

Every device connected to an IP network must have a unique IP address. This address is used to reference the specific unit. The DIL/NetPC ADNP/9200 is automatically assigned an IP address on DHCP-enabled networks as it is DHCP-enabled by default. If DHCP doesn't work (i.e. no DHCP server available), the ADNP/9200 takes a default IP address. The factory-set value for this default IP address is **192.168.0.126**. The network mask for this address is **255.255.255.0**.

You can change this IP address over a RS232-based serial link with the help of program, called **ipaddree**.

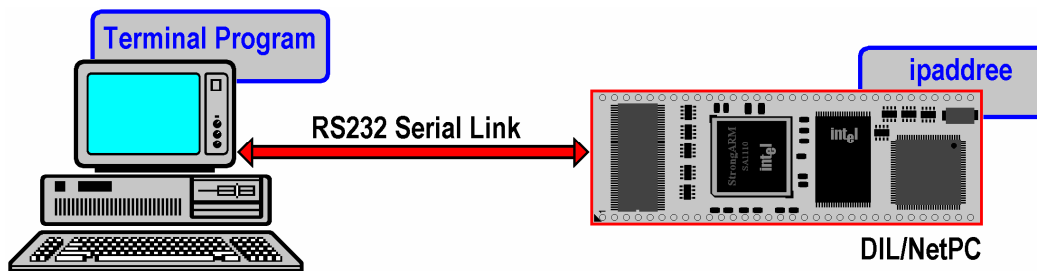

- **1. Step:** Setup a serial link (**RS232 Serial Link**) between the DIL/NetPC ADNP/9200 COM1 serial port and a serial port of your PC system. Use a null-modem cable for the physical connection between the COM1 port of the DIL/NetPC ADNP/9200 and the PC COM port. For more details about this connection please use the DIL/NetPC ADNP/9200 Starter Kit documentation.
- **2. Step:** Run your terminal emulation program. Microsoft Windows-based PC systems offer *HyperTerminal* for this task. Linux-based systems come with *Minicom*. Then power-up your ADNP/9200.

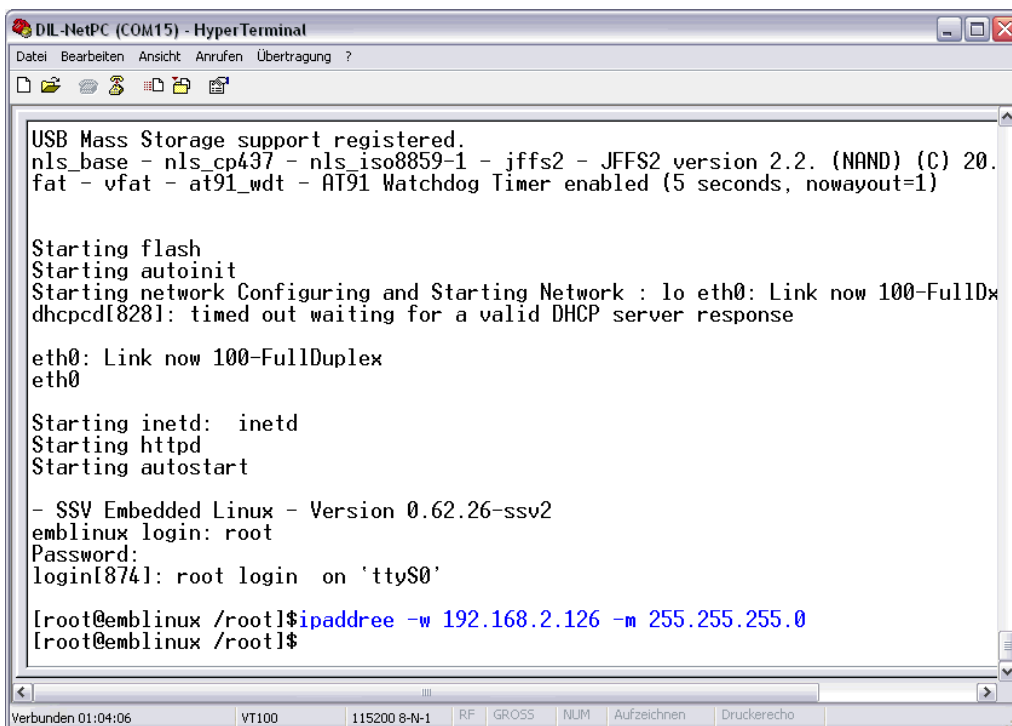

```

DIL-NetPC (COM15) - HyperTerminal
Datei Bearbeiten Ansicht Anrufen Übertragung ?
[Icons]
USB Mass Storage support registered.
nls_base - nls_cp437 - nls_iso8859-1 - jffs2 - JFFS2 version 2.2. (NAND) (C) 20.
fat - vfat - at91_wdt - AT91 Watchdog Timer enabled (5 seconds, nowayout=1)

Starting flash
Starting autoint
Starting network Configuring and Starting Network : lo eth0: Link now 100-FullDx
dhcpcd[828]: timed out waiting for a valid DHCP server response

eth0: Link now 100-FullDuplex
eth0

Starting inetd: inetd
Starting httpd
Starting autostart

- SSV Embedded Linux - Version 0.62.26-ssv2
emblinux login: root
Password:
login[874]: root login on 'ttyS0'

[root@emblinux /root]$ ipaddree -w 192.168.2.126 -m 255.255.255.0
[root@emblinux /root]$
  
```

- **3. Step:** Wait until the ADNP/9200 Linux asks you for a user name. Please enter the user name **root**. This user name needs no password. Just hit the Enter key if the ADNP/9200 Linux asks for a password. Then execute the following command:

```
ipaddree -w 192.168.2.126 -m 255.255.255.0
```

“ipaddree” is the name of a command-line IP setup tool. “192.168.2.126” is a IP address. Use the IP address of your choice for your set-up on this position. “255.255.255.0” is a network mask. Use a valid network mask for your IP address.

- **4. Step:** Reboot the ADNP/9200. The new IP address and network mask is valid after the next boot process if no DHCP server available or if DHCP doesn't work.

That is all.